

This is an electronic reprint of the original article.

This reprint *may differ* from the original in pagination and typographic detail.

Author(s): Jenni Tienaho, Marina Fidelis, Hanna Brännström, Jarkko Hellström, Magnus Rudolfsson, Atanu Kumar Das, Jaana Liimatainen, Anuj Kumar, Mika Kurkilahti, and Petri Kilpeläinen

Title: Valorizing Assorted Logging Residues: Response Surface Methodology in the Extraction Optimization of a Green Norway Spruce Needle-Rich Fraction To Obtain Valuable Bioactive Compounds

Year: 2024

Version: Published version

Copyright: The Author(s) 2024

Rights: CC BY 4.0

Rights url: <http://creativecommons.org/licenses/by/4.0/>

Please cite the original version:

Jenni Tienaho, Marina Fidelis, Hanna Brännström, Jarkko Hellström, Magnus Rudolfsson, Atanu Kumar Das, Jaana Liimatainen, Anuj Kumar, Mika Kurkilahti, and Petri Kilpeläinen, Valorizing Assorted Logging Residues: Response Surface Methodology in the Extraction Optimization of a Green Norway Spruce Needle-Rich Fraction To Obtain Valuable Bioactive Compounds, ACS Sustainable Resource Management 2024 1 (2), 237-249 DOI: 10.1021/acssusresmgmt.3c00050

All material supplied via *Jukuri* is protected by copyright and other intellectual property rights. Duplication or sale, in electronic or print form, of any part of the repository collections is prohibited. Making electronic or print copies of the material is permitted only for your own personal use or for educational purposes. For other purposes, this article may be used in accordance with the publisher's terms. There may be differences between this version and the publisher's version. You are advised to cite the publisher's version.

Valorizing Assorted Logging Residues: Response Surface Methodology in the Extraction Optimization of a Green Norway Spruce Needle-Rich Fraction To Obtain Valuable Bioactive Compounds

Jenni Tienaho,* Marina Fidelis, Hanna Brännström, Jarkko Hellström, Magnus Rudolffsson, Atanu Kumar Das, Jaana Liimatainen, Anuj Kumar, Mika Kurkilahti, and Petri Kilpeläinen




Cite This: *ACS Sustainable Resour. Manage.* 2024, 1, 237–249



Read Online

ACCESS |


 Metrics & More

 Article Recommendations

 Supporting Information

ABSTRACT: During stemwood harvesting, substantial volumes of logging residues are produced as a side stream. Nevertheless, industrially feasible processing methods supporting their use for other than energy generation purposes are scarce. Thus, the present study focuses on biorefinery processing, employing response surface methodology to optimize the pressurized extraction of industrially assorted needle-rich spruce logging residues with four solvents. Eighteen experimental points, including eight center point replicates, were used to optimize the extraction temperature (40–135 °C) and time (10–70 min). The extraction optimization for water, water with Na₂CO₃ + NaHSO₃ addition, and aqueous ethanol was performed using yield, total dissolved solids (TDS), antioxidant activity (FRAP, ORAC), antibacterial properties (*E. coli*, *S. aureus*), total phenolic content (TPC), condensed tannin content, and degree of polymerization. For limonene, evaluated responses were yield, TDS, antioxidant activity (CUPRAC, DPPH), and TPC. Desirability surfaces were created using the responses showing a coefficient of determination (R^2) > 0.7, statistical significance ($p \leq 0.05$), precision > 4, and statistically insignificant lack-of-fit ($p > 0.1$). The optimal extraction conditions were 125 °C and 68 min for aqueous ethanol, 120 °C and 10 min for water, 111 °C and 49 min for water with Na₂CO₃ + NaHSO₃ addition, and 134 °C and 41 min for limonene. The outcomes contribute insights to industrial logging residue utilization for value-added purposes.

KEYWORDS: antibacterial, antioxidant, condensed tannins, extraction optimization, industrially assorted needle-rich logging residue, *Picea abies*, response surface methodology, total phenolic content

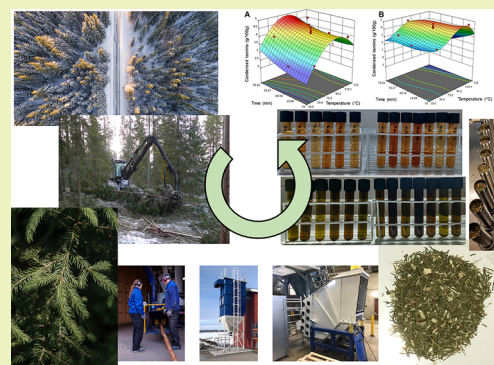

INTRODUCTION

Logging residues are defined as the above-ground biomass left to the felling sites after harvesting the stem wood material, including the tops and branches of harvested trees and small diameter trees from thinnings.¹ High volumes of logging residues are produced yearly. In Finland alone, 4.392 million dry tons of spruce logging residues (branches and needles) are available annually.² The share of Norway spruce needles has been estimated to cover 30% of the total crown biomass.³ Logging residues account for a considerable proportion of the total nutrient pool originally bound in the growing stand,⁴ e.g., nearly 80% of the total N and as much as 90% of the total P of the standing tree biomass pools of these nutrients. Forest litter plays an essential role in the formation of soil humus, which is crucial for soil fertility and nutrient cycling.⁵ Therefore, logging residues are mostly left at the sites to release the nutrients back to forest soils.^{6,7} However, to achieve the renewable energy targets (e.g., in the European Union, Directive 2009/28/EC), there has been a recent increase in the utilization of logging

residues for forest-based bioenergy production,^{8–10} while the high cost of logging residue transportation and dry mass losses discourage bioenergy production from these types of biomasses.¹¹ Besides nutrient recycling and bioenergy production, logging residues offer potential as alternate lignocellulosic materials for several higher value applications, such as reinforcement biomass for biocomposites¹² and growing media.¹³ When separating valuables from logging residues before potential energy use or lignocellulosic applications, it is possible to increase the efficient use of natural resources and promote sustainable development. For

Received: September 20, 2023

Revised: January 17, 2024

Accepted: January 17, 2024

Published: February 2, 2024



example, logging residues could be directed to the extraction of valuable compounds, and the remaining material could be utilized as a source of other bioproducts, biochemicals, or bioenergy.¹² These nature-derived ingredients open possibilities for replacing fossil-based products. However, most of this potential has not been utilized due to the high costs of harvesting, transport, storing, and handling.

Logging residues, especially needles, contain high amounts of valuable extractable compounds. Woody biomass and logging residue extractives can be classified into three groups: aliphatic compounds (e.g., terpenes, terpenoids, fatty acids, and resin acids), phenolic compounds (e.g., stilbenes, lignans, flavonoids, and tannins), and other compounds (e.g., sugars, amino acids, quinones, and alkaloids).¹⁴ Needles contain vitamins, bioactive extractives (up to 43% of dry matter), and protein (about 10% of dry matter).^{15,16} In fact, over 200 compounds have been identified from conifer sprouts and needles, and their chemistry has been found to differ from sap and heartwood compounds.^{17–19} Especially, secondary metabolite-related extractives provide defense for the standing trees against different abiotic and biotic stressors, such as excessive humidity, drought, temperature variation, parasites, bacteria, fungi, and other phytopathogenic organisms.²⁰ Thus, it is common for woody biomass extractives to possess antioxidant and antimicrobial properties, making them useful as preservatives in the food and cosmetic industries and holding potential for medicinal products.²¹ Even without considering the phenomenon of increased antibiotic-resistant pathogens, current antibiotics often cause adverse effects and have difficulties in safe dosing for various individuals.²² Consequently, there is a demand and commercial opportunity for effective, safe, and environmentally friendly antibiotic and antimicrobial substances, and metabolites obtained from abundant woody biomass could offer an attractive source. At the same time, the global market for extractives and other biobased products is growing.²³ Forest biomass-based extractives are potential raw materials to produce a range of added-value products, such as pharmaceuticals or cosmetic ingredients,²⁴ platform and specialty chemicals, and dietary supplements.^{25,26} Forest biomass can also be converted into biopolymers,²⁷ bioplastics,²⁸ foams/emulsions, and coatings²⁹ and used as a potential feedstock for liquid biofuels.¹⁰

Currently, no remarkable utilization of logging residues or needle-based extractive compounds exists in Finland or Sweden. Since there is no industrial utilization of this biomass assortment as a source of biochemicals, methods for its refining require development. Logging residues have a complex and varied nature, and the needles are rich in chemicals, such as waxes, which many biorefining processes cannot handle. Separation of the needles for the extraction of high-value chemicals can improve the quality of the remaining fraction, which can then be used by other processes.¹² However, many existing studies rely on handpicking small quantities of pure needle biomasses, and limited information is available on samples obtained from the industrial-scale assorted fresh biomass material. In addition to the biomass assortment, extraction efficiency is influenced by parameters like the solvent composition, the extraction temperature and time, the particle size of the material to be extracted, the liquid-to-solid ratio, and the pH value.^{30,31} The properties of the extracted compounds need consideration to avoid unnecessary chemical modification during extraction by hydrolysis, oxidation, and isomerization reactions.³² Excessively high extraction temper-

atures could degrade targeted molecules, such as condensed tannins.³³ Generally, extractions can be facilitated and higher yields obtained by increasing the temperature and solvent-to-solid ratio to favor solubilization and diffusion.^{34,35} However, excessively elevated temperatures not only cause the decomposition of thermolabile compounds but also lead to solvent losses and extracts containing impurities or unwanted compounds. Additionally, extraction efficiency increases only up to a certain point, and the extractable compounds of interest may begin to degrade when extraction time is prolonged.³⁶ Pretreatment, conservation, and storage of plant material significantly influence extraction yield and must be carefully controlled. Generally, the extraction of plant material leads to the recovery of a wide variety of components.³¹ Thus, the obtained extract must undergo further treatment and refining before achieving the desired final form for different applications. Typically, the required treatments after extraction are (i) separation of solids, (ii) concentration of extracts via solvent evaporation, (iii) fractioning and enrichment of target components, (iv) removal of impurities, and (v) drying of the products.

Solvent properties, such as polarity, affect the composition of the biomass extract. In addition to physical solubility, extraction performance is directly related to solvent and solute similarities regarding functional groups. It is known that less polar solvents generally extract lower amounts of polyphenols. Usually, highly hydroxylated aglycone forms of polyphenols are soluble in water, alcohols (e.g., methanol, ethanol), or mixtures of these. In contrast, less polar and highly methoxylated aglycone forms are extracted through less polar solvents (e.g., acetone, ethyl acetate). Given that the hydroxyl groups of phenolic compounds contribute to the antioxidant activity, more polar extracts typically show higher antioxidant activities due to the rupture of cell membranes caused by the alcoholic solvent, providing endocellular extraction.^{37,38} It is also preferable to use solvents that are considered green based on their environmental, safety, and health effects.³⁹ Water is an environmentally friendly polar solvent able to extract polar compounds, and water extraction conditions can be modified using chemical additions to adjust pH (e.g., Na_2CO_3)⁴⁰ and to react with condensed tannins (e.g., NaHSO_3)⁴¹ to enhance the extraction yield. Ethanol is a solvent able to extract both nonpolar (lipophilic) and polar (hydrophilic) compounds. In addition to water, ethanol is a common solvent approved by the European Union to extract food ingredients.⁴² Limonene (1-methyl-4-isopropenylcyclohex-1-ene) is a nonpolar monoterpene naturally found in Norway spruce (*Picea abies*) needles⁴³ and woody materials.⁴⁴ Among terpenes, limonene is a greener solvent alternative usually used for lipid extractions, which provides lower toxicity, environmental risk, and flammability than other conventional solvents, such as hexane.^{45,46} Limonene is also an edible food ingredient and used as a sweetener and fragrance in the food and cosmetics industries.⁴⁷ Given its inherent presence in woody materials, limonene could be used in extractions, and the potential of recycling it back to the extraction process could further extend its life cycle in biorefinery applications.

This study aims to introduce environmentally friendly and industrially feasible processes for the utilization of extractives from logging residues. The logging residue branches were chipped, and the needle-rich fraction was separated with a cyclone followed by mechanical sieving. According to previous literature, the content of polyphenols, such as stilbenes, can be

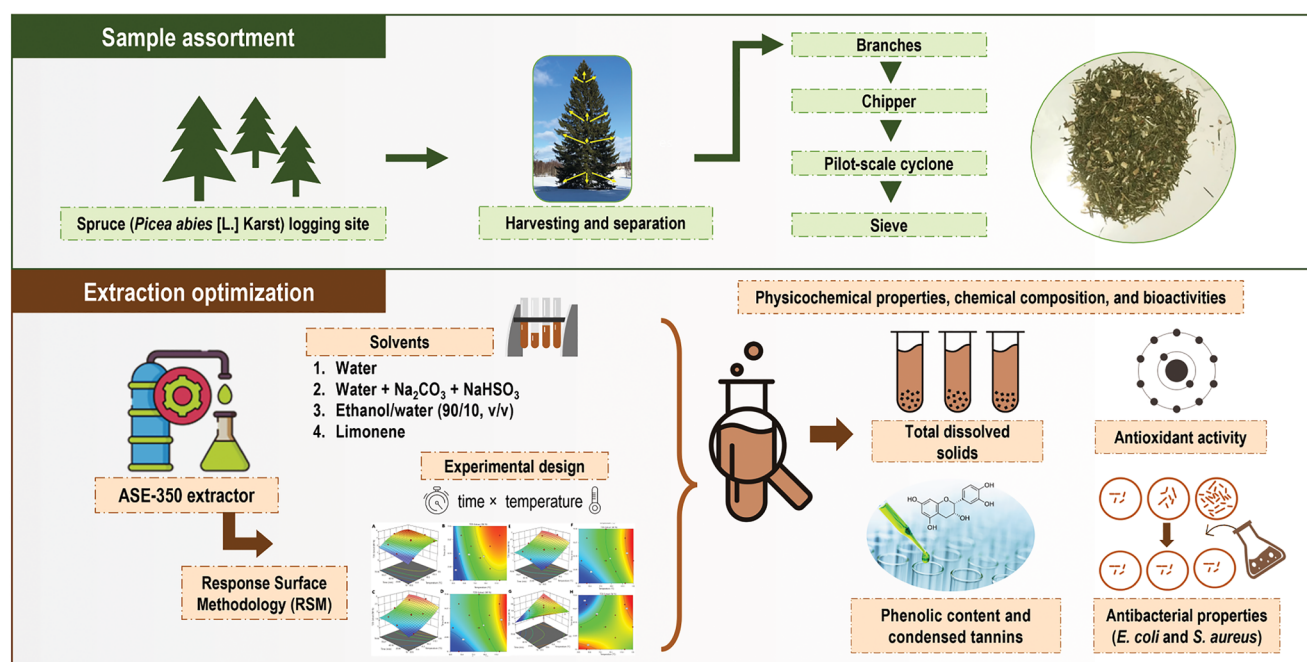


Figure 1. Overall study scheme.

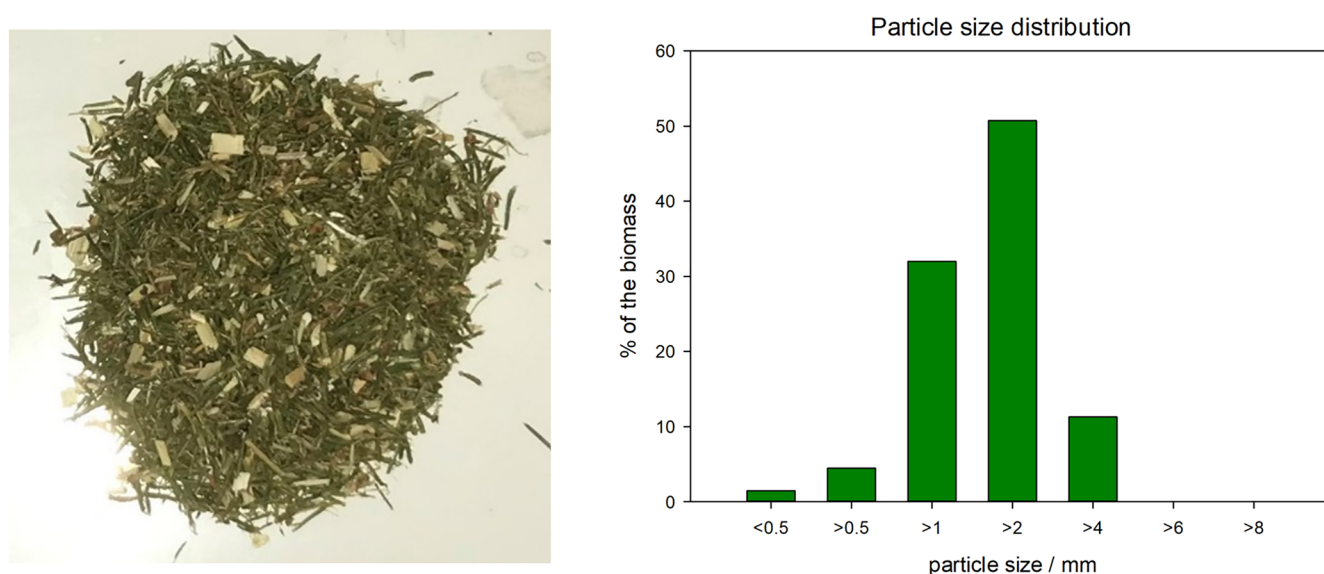


Figure 2. Needle-rich fraction obtained by the assortment procedure and the particle size distribution of the fraction.

reduced by up to 40% after 10 h of drying.⁴⁸ Logging residues also need to be collected and refined as fresh as possible to avoid the losses of extractives.^{49,50} Thus, in this study, the process was kept industrially feasible and rapid while avoiding energy-inefficient drying. Optimization of extraction time and temperature was performed against multiple responses, such as the extract bioactivities, which were detected using antioxidant and antibacterial analyses, and tannin quantification with chromatographic methods. Until now, the process optimizations for hydrothermal extraction of logging residues have rarely been reported. Considering the complex chemical compositions of the logging residues, a robust and controlled optimization is needed for their efficient valorization. Given that multiple process parameters impact the extraction process and properties of extracted compounds, the response surface methodology (RSM) combined with the design of experiments

(DOE) was chosen for optimization. The RSM is an effective mathematical and statistical tool for evaluating the effect of independent variables and their interactions.^{51–54} In the literature, the RSM and DOE optimization have mainly been reported in the ultrasonic extraction of different biomasses, including tree leaves, for the recovery of bioactive compounds.^{51,55}

In this study, the pressurized extraction of industrially assorted logging residues using four solvents with differing characteristics was optimized. Simultaneously, up to 11 responses or target variables were considered using the RSM. This approach maximizes the potential to obtain industrially feasible valuable extracts characterized by varying polarity with a high concentration of condensed tannins and total phenolics as well as antioxidant and antibacterial properties.

EXPERIMENTAL SECTION

Collection and Assortment of Raw Material. The full study scheme of this investigation is presented in Figure 1. Logging residues used in the trials consisted of branches from a spruce (*Picea abies* [L.] Karst) harvested in Håknäs, Sweden (63°54'0"N and 19°74'1"E) in a 70-year-old stand. The harvesting and separation of green needles were completed within 1 week in May 2021. The separation work was carried out at the Biomass Technology Centre (BTC), Swedish University of Agricultural Sciences (SLU), Umeå, Sweden.

The separation of green needles from the rest of the branch material occurred in three steps. Branches were chipped (Edsbyhuggen, Woxnadals Energi AB, Sweden) to enable the feeding of the material to a pilot cyclone.⁵⁶ The impact of the material fed through the cyclone allowed the separation of the needles from the rest of the branch material. This process facilitated the production of a fraction with a higher proportion of needles by mechanically sieving (Fredrik Mogensen AB, Mogensen Sizer E0554) the material, and the fraction with particle size ≤ 4 mm was used (Figure 2).

Chemicals. (–)-Limonene (96%) was purchased from Acros Organics (Spain) and ethanol (99.5%) from Altia (Finland). Na_2CO_3 was from BDH (England) and NaHSO_3 from Acros Organics (Belgium). If not otherwise mentioned, all other chemicals were obtained from Sigma-Aldrich (Sigma-Aldrich Chemie GmbH, Steinheim, Germany).

Extraction Method and Solvents. Assorted logging residue samples were extracted with an accelerated solvent extractor (ASE-350, Dionex, USA) using four different solvents: water, water with Na_2CO_3 (20 g/L) and NaHSO_3 (20 g/L), ethanol/water (90/10, v/v), and limonene. The amounts of fresh samples were adjusted according to the moisture content so that there would be 10 g of oven-dried sample in each extraction in a 100 mL extraction vessel. For $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ additions, the concentration of the extraction liquid was adjusted to ensure that, upon addition, the liquid and the moisture content in the fresh sample were combined, resulting in a total liquid concentration of 20 g/L for both Na_2CO_3 and NaHSO_3 in the vessel. After the extractions, extracts were collected and stored in a freezer (-20°C) before further analyses.

Responses. The extraction optimization for water, water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition, and aqueous ethanol was performed using yield, total dissolved solids (TDS), antioxidant activity (FRAP, ORAC), antibacterial properties (*E. coli*, *S. aureus*), total phenolic content (TPC), condensed tannin content, and degree of polymerization. For limonene, evaluated responses were yield, TDS, antioxidant activity (CUPRAC, DPPH), and TPC. The detailed method descriptions for the individual responses can be found in the Supporting Information (Supplementary Document 1).

Experimental Design and Statistical Optimization. The experimental design was created using the Design Expert DX13 V. 13.0.8.0 (StatEase, Minneapolis, USA) program. The response surface methodology (RSM) was employed to investigate the effects of time and temperature (factors) on the yield and TDS of the extracts, TPC, antioxidant capacities, antibacterial effects, and condensed tannins (responses). A central composite response surface design was utilized for each solvent with 18 runs, and the time and temperature combinations were chosen by Design Expert. The combinations were run in a randomized order. Analysis results were utilized to identify optimized conditions for forest residue extractions with each solvent. Optimization was performed using the Design Expert desirability function.⁵⁷ The best model was selected among the first-, second-, or third-order polynomial models. Mathematical modeling, information on optimized factors, and the two-factor central composite quadratic design used for optimization can be found in the Supporting Information (Supplementary Document 1).

RESULTS AND DISCUSSION

In this section, results are primarily presented using the response surface models (see details in Supplementary Tables 1–4). All extraction run responses with each solvent can be

found in the Supporting Information (Supplementary Table 5).

Extraction Yield. The extraction yields (in mg/g original dry sample) are presented in Table 1, and the TDS RSMs are illustrated in the Supporting Information (Supplementary Figure 1).

Table 1. Extraction Yields (mg/g original biomass DW) for All Solvents

run	temperature (°C)	time (min)	yield per original dry sample (mg/g)			
			aqueous ethanol	water	water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$	limonene
1	120	60	245	194	207	65
2	85	35	196	147	142	54
3	40	35	113	116	85	48
4	50	60	147	131	102	50
5	85	35	196	142	145	58
6	50	10	107	97	69	51
7	85	70	211	153	159	64
8	135	35	221	218	203	63
9	85	35	194	140	139	63
10	120	10	197	159	158	57
11	85	35	188	142	140	55
12	85	35	185	147	139	64
13	103	48	207	165	175	58
14	85	35	187	145	137	62
15	85	35	191	147	142	57
16	68	48	170	130	127	48
17	103	23	194	154	170	62
18	85	35	186	138	155	64

Extraction yields increased as extraction time and temperature increased in all solvents except limonene (Table 1). The highest yields were obtained with aqueous (aq.) ethanol, followed by water and water with chemical additions. Solvents were selected to include water as a polar solvent for hydrophilic compounds, aqueous ethanol as a general solvent for both lipophilic and hydrophilic compounds, and a nonpolar solvent, limonene, for lipophilic compounds to cover the whole polarity range. Bioactive extractables from needles with varying polarities can belong to diverse chemical groups, such as terpenes, fatty acids, sterols, waxes, and phenolic compounds.^{17–19} However, the compound profiles can vary according to the maturity of the needles,⁵⁸ moisture and nutrient availability from the soil,⁵⁹ and solar UV radiation as well as seasonal differences.⁶⁰ The overall extraction yield of water (97–218 mg/g) was like spruce bark hot water extraction yields (37–209 mg/g) obtained in previous literature.^{40,61–64} Aqueous ethanol extractions had a 107–245 mg/g yield range, while water with Na_2CO_3 and NaHSO_3 additions had a slightly lower 69–207 mg/g yield range. Limonene results were contradictory due to the large variation of TDS results in the center point (Supplementary Figure 1). During oven drying for TDS determination, limonene extracts formed a hardened surface layer preventing evaporation. While this phenomenon was addressed using sand to break the surface tension, it is possible that this affected both the yield and the TDS for limonene extracts and resulted in larger replicate variation. Limonene yields were also lower than with other solvents as it can mainly extract nonpolar compounds. Lack of fit *p* values for the repeated extraction conditions in the

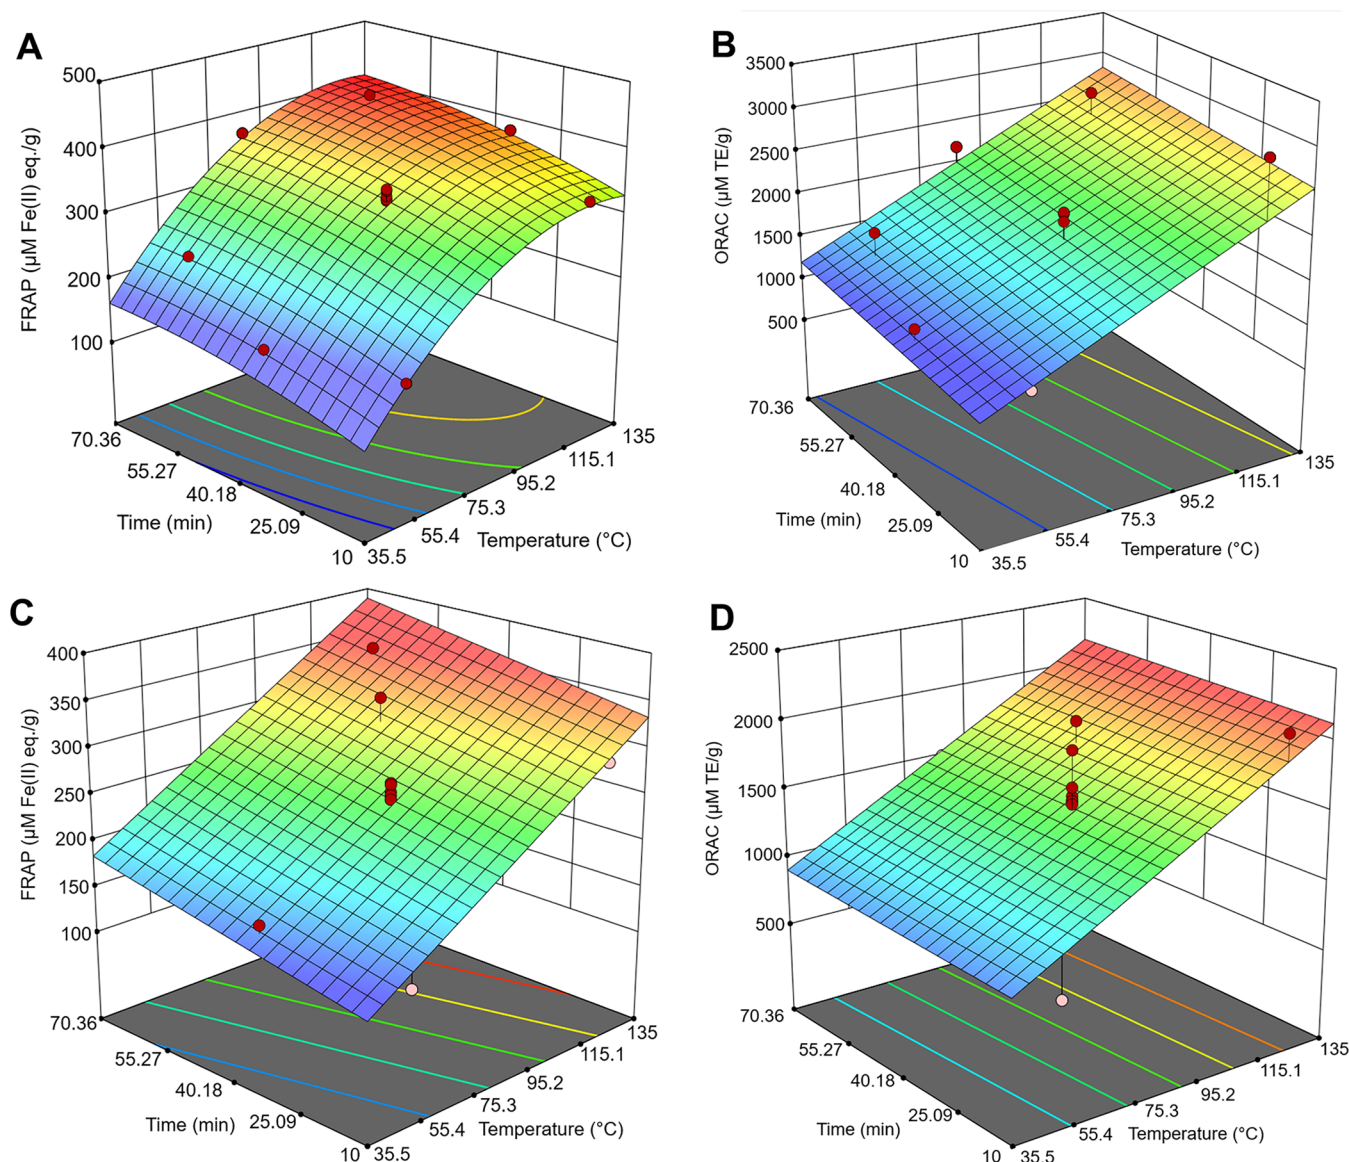


Figure 3. Antioxidant test result response surfaces for aq. ethanol extracts (A) FRAP ($\mu\text{M Fe(II) eq./g}$) and (B) ORAC ($\mu\text{M TE/g}$) and water extracts (C) FRAP and (D) ORAC. RSM was quadratic for A ($R^2 = 0.9687$) and linear for B ($R^2 = 0.9234$), C ($R^2 = 0.7127$), and D ($R^2 = 0.7154$).

middle were all not significant, which indicates that the models fitted rather well: 0.5018, 0.6273, 0.6273, and 0.5962 for aq. ethanol, water, water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$, and limonene, respectively.

Total Phenolics. The phenolic content increased as the extraction temperature and time increased (Supplementary Figure 2). Overall, the results are in the same range as those in previous studies published using similar extraction parameters (e.g., Pap et al.⁶⁴ for spruce bark). In the models for aq. ethanol, water, and limonene, large variation was observed in the middle point replicated 8 times. The variation was lower for water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition extracts, where TPC values were mostly in the same range as those in aq. ethanol and water extracts, but temperatures over 100 °C increased the TPC values up to 23.81 mg GAE/g. It can be speculated that this increase is caused by the degradation of lignin polymers, which includes phenolic compounds that could then be detected by this method.^{65,66} The TPC values were 10-fold higher for the limonene extracts. Instead of the Prussian blue methodology used for other extractions, the

modified Folin–Ciocalteu method used for limonene extracts enables simultaneous measurement of lipophilic and hydrophilic polyphenols. This indicates that the Folin–Ciocalteu test method is more sensitive to the phenolics from coniferous extracts, and this hypothesis is also supported by previous literature.⁶⁷

Antioxidant Properties. The obtained FRAP values were max 355 $\mu\text{M Fe(II) eq./g}$ for water and 411 $\mu\text{M Fe(II) eq./g}$ for aq. ethanol extraction. Jyske et al.¹⁵ found that freshly frozen needle biomass extractions yielded FRAP values of approximately 800 $\mu\text{M Fe(II) eq./g}$ for both water extraction and 70:30 (vol %) ethanol/water extraction. Our results are lower, which can result from the industrially feasible assortment not producing a completely pure needle fraction for the extraction. However, ORAC values obtained in this study are within the same range as those found by Jyske et al.,¹⁵ suggesting that ORAC active substances are not as susceptible to changes in the sampling, assortment, and handling procedures. From the antioxidant response surface models of aq. ethanol and water extracts (Figure 3), the variation in the

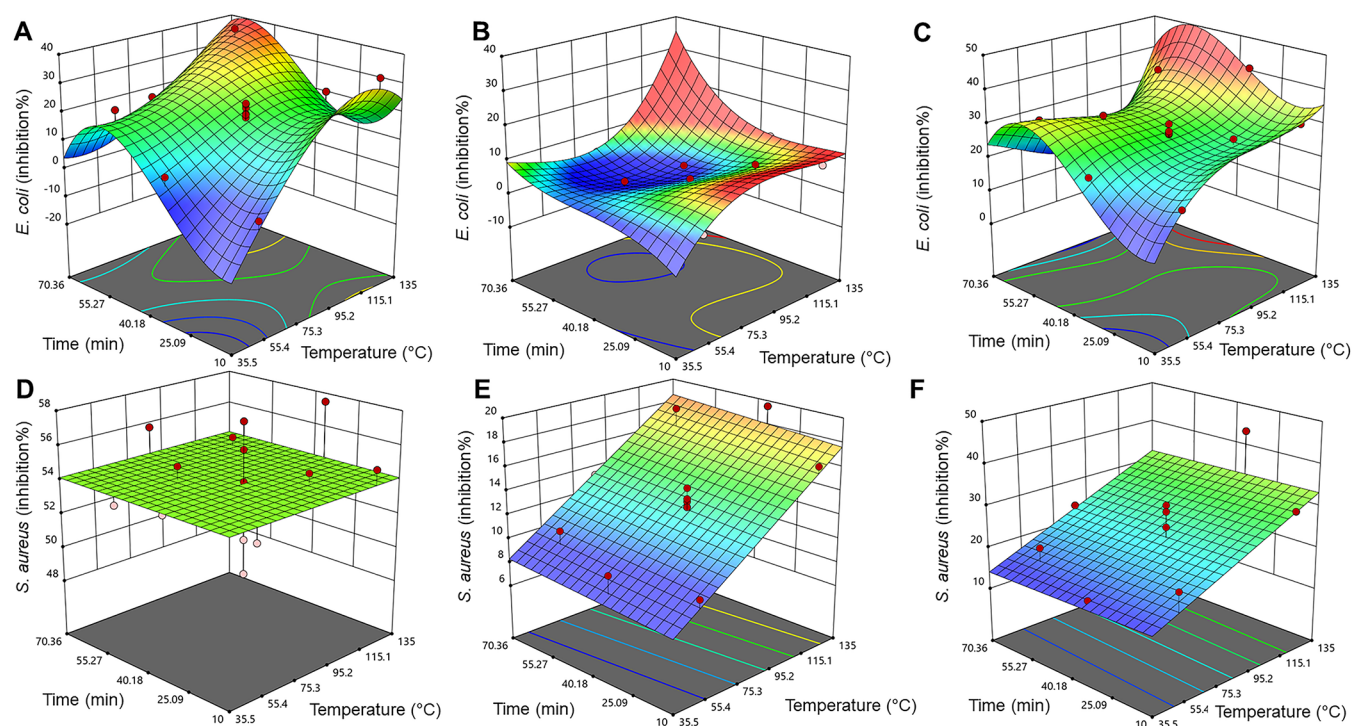


Figure 4. Inhibition percent value response surfaces for *E. coli* by aq. ethanol (A), water (B), and water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition extracts (C), and *S. aureus* inhibition percent in aq. ethanol (D), water (E), and water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition extracts (F). The RSM was cubic for A ($R^2 = 0.7753$), B ($R^2 = 0.8438$), and C ($R^2 = 0.7403$), whereas it was mean for D ($R^2 = \text{none}$) and linear for E ($R^2 = 0.8276$) and F ($R^2 = 0.3512$).

center point was low in all but ORAC for water extracts (Figure 3D). All response surface models showed a high enough coefficient of determination values (R^2) to be considered for the optimization. For aq. ethanol extraction, the highest FRAP values were obtained with 120 °C and 60 min extraction, and in temperatures over that (135 °C), the antioxidant results were lower. In contrast, with ORAC for aq. ethanol extracts and both FRAP and ORAC for water extracts, the values increased in a linear manner as the extraction temperature and time increased.

Water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ and limonene extracts showed more variation both in the center point and also from the response surface models (Supplementary Figure 3). The best-fit models were chosen, and only FRAP for water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ extracts and DPPH for limonene extracts showed high enough coefficient of determination values ($R^2 > 0.7$) to be considered for optimization. In all but DPPH for limonene extracts, the higher the extraction temperature and time, the higher the expected values, whereas the expected DPPH results seemed to be more dependent on the temperature than time. DPPH values of the obtained lipid fractions in this study were low when compared to previous literature (e.g., Pap et al.⁶⁴ for spruce bark extraction with water), and the differences between runs with different extraction parameters were small. Limonene is a nonpolar solvent, and the polarity and water solubility of extractables have been found to affect the antioxidant activities. As an example, Hofmann et al. found that catechins and their oligomers (procyanidins) had the highest levels in the 10–20% v/v acetone extracts, flavonoid glycosides were best soluble in 30–50% v/v acetone solutions, while derivatives of phenolic acids and stilbenes had the highest levels in 50–60% v/v acetone extracts.⁶⁸ In addition, limonene itself has been found

to possess antioxidant properties in the DPPH assay.⁶⁹ Thus, while the expected activities were lower than those with polar solvents, the inherent solvent activity can also mask small differences in results.

Antibacterial Analyses. Overall, the obtained antibacterial results are typical for unpurified extracts in the case of the aq. ethanol and water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition extracts with *E. coli*, from 0.9% to 40% inhibition, and *S. aureus*, from 15.5% to 57.6% inhibition. A similar range of antibacterial results has been obtained, for example, in the case of unpurified bark extracts using the same bacterial method by Välimäa et al.⁷⁰ For the water extracts, the results are low, 3.4–11.1% for *E. coli* and 9.6–19.5% for *S. aureus*, but comparable to those received using the same bacterial method for *E. coli* with pure α - and β -pinene by Muilu-Mäkelä et al.⁷¹ with 0.8–1.6 mg/mL concentration. For *S. aureus*, the results obtained in this study are lower, suggesting that the used 1 mg/mL concentration of the samples is insufficient for unpurified extraction products. Unpurified extraction products also likely contain carbohydrates, which could serve as a nutrient source for the bacteria. In the bacterial test results of aq. ethanol, water, and water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition extracts (Figure 4), it is evident that variation at the center point is small for all but *S. aureus* and aq. ethanol extracts (Figure 4D, discarded from the optimization) and *S. aureus* and water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition extracts (Figure 4F). The variation in these result surfaces suggests that the *S. aureus* strain is more sensitive to the effect caused by the solvents than *E. coli*. Limonene extracts could not be tested against bacteria due to the strong antibacterial activity of the solvent itself.⁷¹ Coniferous species have been shown to harbor various compounds with broad-acting antimicrobial properties including volatiles such as terpenoids, polyphenolic compounds, and

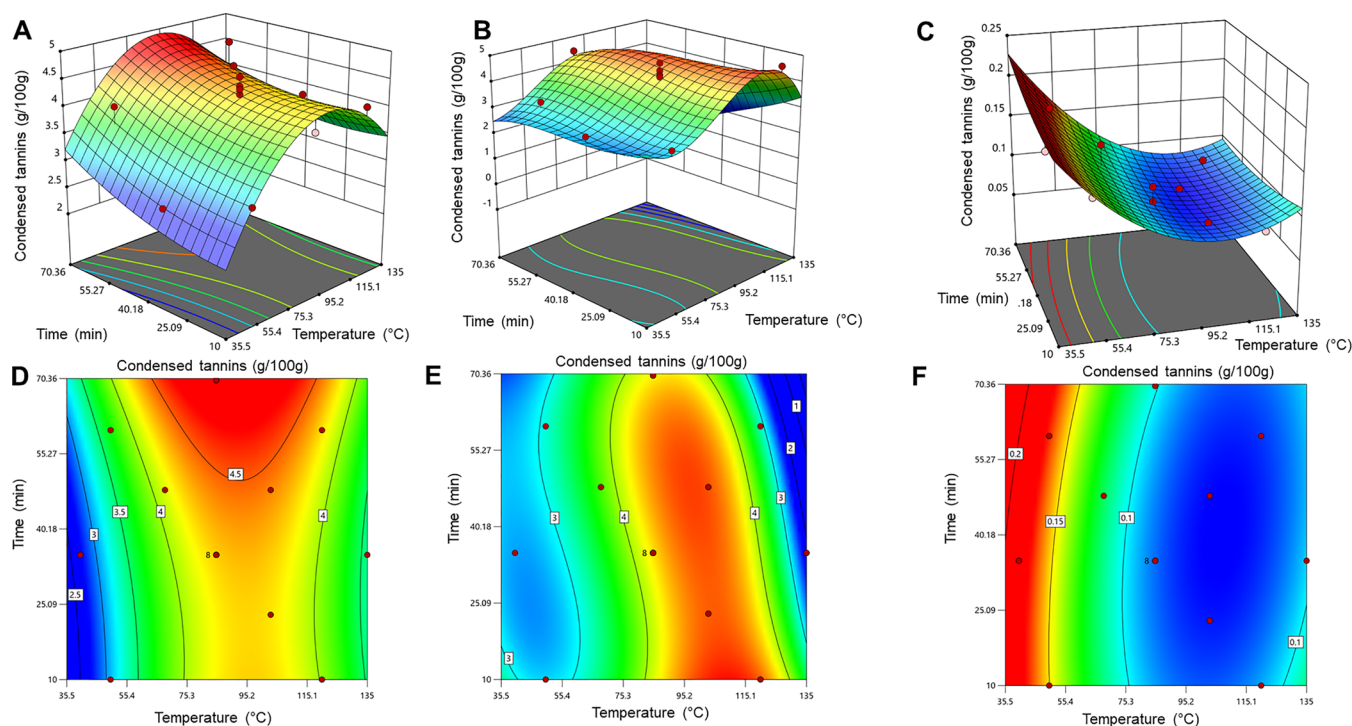


Figure 5. Three-dimensional surface (A, B, and C) and contour graphs (D, E, and F) depicting the yield of condensed tannins (g/100 g of dry extract) for aq. ethanol (A, D), water (B, E), and water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition (C, F). The RSM was quadratic for A ($R^2 = 0.7769$), cubic for B ($R^2 = 0.9310$), and quadratic for C ($R^2 = 0.8399$).

piperidine alkaloids.^{71–77} In the response surface model for water extracts with *E. coli* (Figure 4B), there is a sink at the approximate middle point of the surface. Therefore, even though the coefficient of determination for the surface is desirable ($R^2 = 0.8438$), this model was not considered for optimization due to its unusual behavior, likely caused by an overcompensation by the cubic model.

Condensed Tannin Content. Condensed tannins (Figure 5) in spruce logging residues were mixtures of procyanidins and prodelphinidins, consistent with previous studies on spruce bark and needles.^{48–50,78} The yield of condensed tannins was dependent on the extraction time and temperature. Interestingly, there were high-yield ridges at the 90–100 °C temperature range in water and aq. ethanol extraction. In that area, increasing extraction time increased yield slightly for aq. ethanol extractions. For water extractions, the highest yield area is in the temperature range of 90–110 °C, and prolonged extraction time did not improve the yield. It has been proven that rather short extraction times may be preferable when pressurized hot water is applied for the extraction of tannins and other polyphenols to avoid thermal degradation of these compounds.⁷⁹ The extractions with sodium salts, i.e., water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$, modified the tannin structure, yielding sulfonated derivatives, resulting in a decrease in the native forms of condensed tannins when time and temperature increased. Thus, in the water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition extracts, the highest free tannin yields were obtained with the lowest extraction temperatures. Unfortunately, it was not possible to determine the sulfonated tannin derivatives with the applied determination method.

Optimized Conditions. Since the goal was to obtain the most promising bioactive extracts, antioxidant activity, antibacterial properties, phenolic content, and condensed tannins responses were chosen to have the highest importance

(3), if their adjusted coefficient of determination (R^2) values were over 0.7, they were statistically significant in the 5% ($p < 0.05$) level of or lower, and their adequate precision (or signal-to-noise ratio) was over 4, with their lack of fit values being statistically insignificant ($p > 0.1$). If these criteria were not met, the response was not considered for the optimization. A high extraction yield (TDS) without bioactivity was not desired and thus not considered for optimization. Also, the composition of condensed tannins (procyanidins or prodelphinidins) was not considered crucial for the optimization. In total, four RS models were created to predict the effects of temperature and time on the extraction of logging residues for different solvents (i.e., water, water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$, aq. ethanol, and limonene). Optimization results and chosen responses are shown in Table 2, and contour plots of the desirability areas are displayed in Figure 6. The relatively low temperature range from 40 to 135 °C and short extraction times from 10 to 70 min were chosen for energy preservation purposes, as less energy is used for heating, and extraction

Table 2. Optimized Extraction Conditions for Aqueous Ethanol, Water, Water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$, and Limonene

extraction solvent	temperature (°C)	time (min)	desirability	responses
aq. ethanol	125	68	0.891	5 (TPC, FRAP, ORAC, <i>E. coli</i> , CT)
water	120	10	0.826	5 (TPC, ORAC, <i>S. aureus</i> , CT, DP)
water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$	111	49	0.890	3 (ORAC, <i>E. coli</i> , DP)
limonene	135	41	1.000	1 (DPPH)

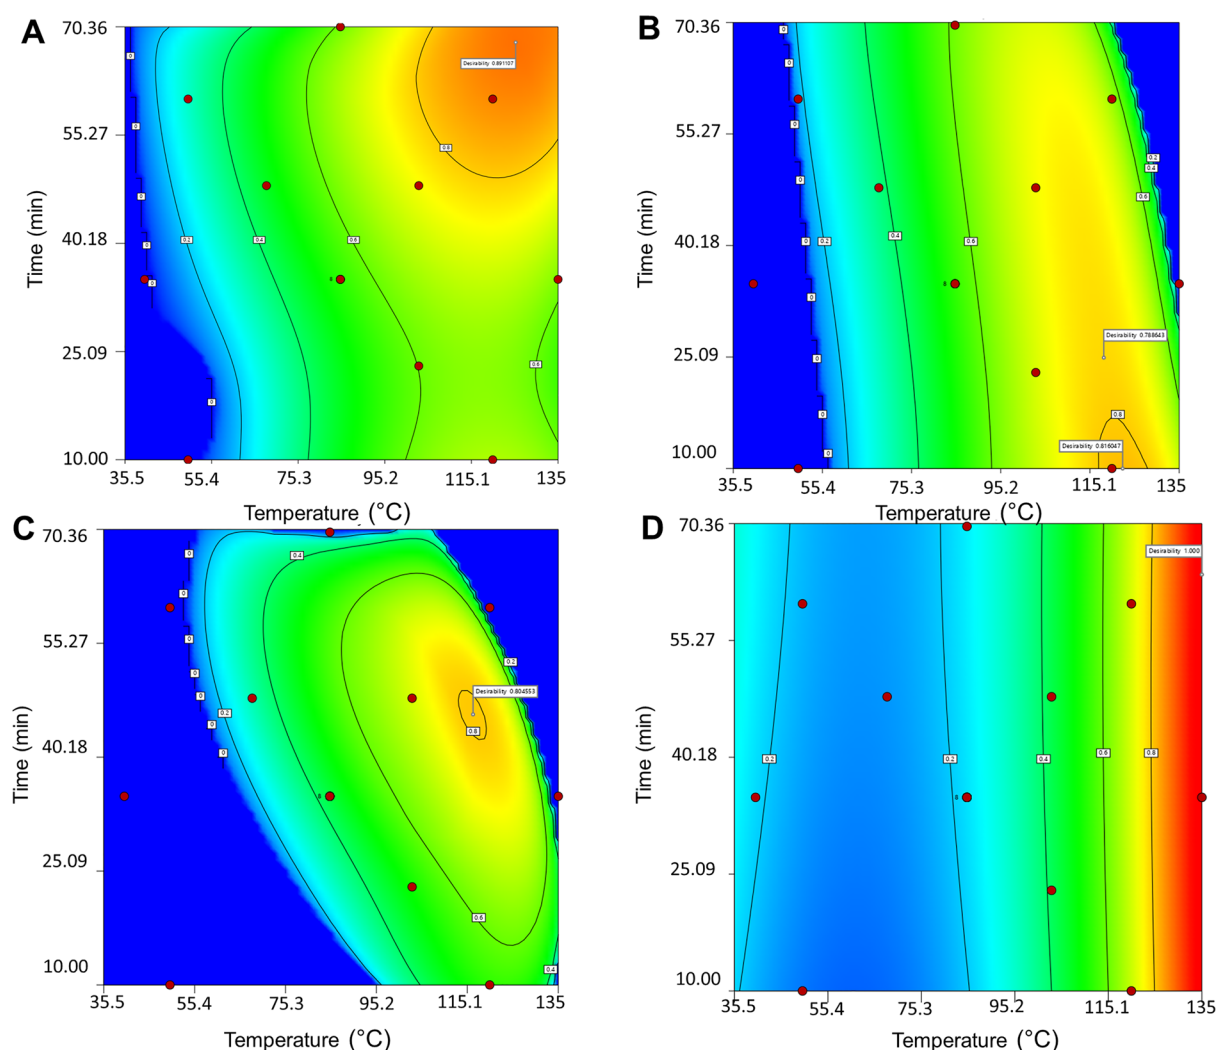


Figure 6. Desirability areas in contour plots for aq. ethanol (A), water (B), water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition (C), and limonene (D) extraction.

could be performed under the solvent boiling point to potentially avoid the need for a pressurized vessel. However, the results showed that the optimized temperatures exceeded the boiling point for all solvents. Generally, considering hydrolytic, oxidative, and isomerization reactions, temperatures under 100°C are preferable. At higher temperatures ($>150^\circ\text{C}$), structural polymers such as hemicellulose and lignin start to be hydrolyzed and extracted. The aim was to obtain bioactive compounds mainly present in the cellular matrix. In addition, it has been shown that a prolonged extraction time can decrease the yield of polyphenolic and antioxidant compounds.⁸⁰ Detailed information on the analysis of variance, sum of squares, degrees of freedom, mean squares, F values, and p values of the fitted models for all four solvent choices can be found in the Supporting Information (Supplementary Tables 1–4).

Based on the optimization, aqueous ethanol extraction should be carried out at 125°C for 68 min (Table 2) to obtain an extract with the desired properties. The optimum values for water extraction were 120°C and 10 min, resulting in a similar temperature range as with aqueous ethanol but a reduced extraction time. The difference can be explained by the high yield of condensed tannins in the earlier phase of water extraction (Figure 5A and 5B). For water extraction with

$\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition, the optimal temperature was 111°C and the extraction time was 49 min, yielding a temperature range quite similar to that of water and aq. ethanol. Interestingly, the optimized extraction time fell between the values of aq. ethanol and water extractions. For water and water with $\text{Na}_2\text{CO}_3 + \text{NaHSO}_3$ addition, higher temperatures and extraction times were not preferred (upper right corner, Figure 6B and 6C). In contrast, with aq. ethanol extraction (Figure 6A), optimized conditions were near the edge of the highest temperature and time values, indicating differences between solvents and their applications.

Optimized conditions (135°C and 41 min) for limonene extraction were primarily dependent on the extraction temperature (Figure 6D). Unlike other solvents, extraction time was not a critical factor in determining the optimal conditions. Only one of the responses met the requirements for consideration in the optimization of limonene extraction. There was evident heterogeneity in the industrially assorted needle-rich logging residue fraction from chipped branches (Figure 2). In addition to needles, various wood, bark, and twig parts were present, creating a complex biological matrix for extraction. Despite this complexity, the extraction optimization was successfully performed, and the theoretical optimization solutions are presented in Table 3.

Table 3. Theoretical Optimization Solutions Obtained with the Design Expert Software^a

solvent	TDS, W-%	TDS, mg/g	FRAP, $\mu\text{M Fe(II)}$ eq/g	ORAC, $\mu\text{M TE/g}$	TPC, mg GAE/g	<i>E. coli</i> , inh %	<i>S. aureus</i> , inh %	CT, g/100 g	DP	PC, %	PD, %
aq. EtOH	3.4	241	412	2664	14	36	54	4.2	3.5	96	4
water	2.1	162	303	1933	11	12	16	4.6	3.8	97	3
water with Na ₂ CO ₃ + NaHSO ₃	2.3	186	977	4280	19	34	28	0.1	2.2	100	0
solvent	TDS, W-%	TDS, mg/g	CUPRAC, mg AA eq/g	DPPH, $\mu\text{M AA}$ eq/g	TPC, mg GAE/g						
limonene	0.9	63	317	2.6	334						

^aThe responses used in the optimization are in bold.

In the optimized conditions (Table 3), water and water with Na₂CO₃ + NaHSO₃ addition yielded a lower theoretical overall extraction yield compared to aq. ethanol. The poor TDS yield of limonene is mainly attributed to its ability to extract nonpolar compounds. The high yield for aq. ethanol could be explained by the solvent's properties, allowing it to dissolve both polar and nonpolar compounds, such as waxes. The hydrophobic epicuticular waxes in the needles may hinder water permeability during extraction, resulting in lower TDS values. Water extraction with chemical addition showed the highest antioxidant (FRAP and ORAC) and TPC values compared to other solvents. This can be partly explained by the pH differences induced by the solvents. While water extracts yielded acidic pH values from 4.11 to 4.31, water extraction with Na₂CO₃ + NaHSO₃ addition generated alkaline extracts with pH values between 8.95 and 9.85. Many of the used bioactivity tests are sensitive to pH changes, and alkaline extraction products can partly explain the higher activity results. Aqueous ethanol extracts exhibited the highest antibacterial activity in the model, while water yielded the lowest. Water would provide the highest yield for obtaining condensed tannins, with aq. ethanol showing similar values. Water extraction with Na₂CO₃ + NaHSO₃ addition yielded sulfonated tannins, explaining the low value in the model.

Despite the evident heterogeneity, we were able to extract antioxidant and antibacterial products from industrially feasible starting material. The expected phenolic capacities were comparable to other wood-based extracts, such as 12 mg GAE/g (TPC) of Norway spruce bark with hot water extraction.⁶⁴ The expected antioxidant ORAC values were also proportionate and, in some cases, even higher than those in a study by Jyske et al.,¹⁵ where ORAC values for freshly frozen pure needle biomass yielded approximately $1 \times 10^3 \mu\text{M TE/g}$ for hot-water extraction and $2 \times 10^3 \mu\text{M TE/g}$ for ethanol–water (70:30) extraction. However, the theoretical FRAP values in our study were approximately one-half of those obtained by Jyske et al.,¹⁵ possibly due to differences in the sample heterogeneity. Additionally, the optimized theoretical antibacterial activities were comparable to unpurified natural extracts of spruce bark, as demonstrated by Välimäa et al.⁷⁰ The only exception is the expected antibacterial activity for water extraction, which is low for *S. aureus* and is attributed to the extracts containing carbohydrates that can serve as nutrition for the bacteria. While it is effortless to find suitable comparable studies for aq. ethanol and water extraction, there are limited studies available for less traditional solvents like water with chemical addition and limonene. However, Kilpeläinen et al.⁴⁰ found that sodium carbonate addition improved the spruce bark hot water extraction yield in temperatures within 60–90 °C. The findings of this study exhibit a similar trend with Na₂CO₃ + NaHSO₃ addition,

where the alkalic pH can, at least partly, contribute to the increase in the antioxidant and antibacterial activities. Limonene itself has been found to possess both antioxidant and antibacterial properties and is primarily used for the extraction of nonpolar compounds such as lipids.^{69,71} For instance, pressurized limonene extraction was considered an interesting solvent alternative for extracting lipids from marine algae, with extraction efficiency dependent on the microalgae species chosen.⁸¹ However, in this study, our focus was on bioactivity maximization. While investigating the lipid profiles would have been interesting, it was beyond the scope of this study. Bioactive lipids, although existing, typically do not exhibit their highest potential in terms of antioxidant and antibacterial properties. Therefore, unsurprisingly, limonene extracts yielded the lowest expected bioactivities in this study.

Verification of the theoretical results was performed for aqueous ethanol under the extraction conditions of 110 °C and 60 min, and the theoretical and experimental results are presented in the Supporting Information (Supplementary Table 6). The verification reveals that within the 95% tolerance interval for a 99% population, TDS, yield, ORAC, TPC, and *E. coli* results fall between the highest and the lowest predicted values. However, values for FRAP and *S. aureus* did not fit between the tolerance intervals. This further supports our hypothesis that the FRAP test is more sensitive to potential changes in sampling, assortment, and handling procedures, leading to variation in the heterogeneous biomass constitution. The RSM for *S. aureus* (Figure 4D) demonstrates that the strain is too sensitive to the solvent itself to provide proper values in the optimization, and it was not considered for constructing the desirability surfaces. Therefore, it is evident that the optimization could be verified as successful as can be expected for industrially assorted and heterogeneous sample biomass.

CONCLUSIONS

In this study, we present a biorefinery-inspired option for the higher potential utilization of needle-rich logging residues. The study demonstrates that the extraction of industrially assorted spruce logging residues to obtain antioxidant and antibacterial fractions is feasible and can be successfully optimized. The optimized extraction conditions were 125 °C and 68 min for aqueous ethanol, 120 °C and 10 min for water, 111 °C and 49 min for water with Na₂CO₃ + NaHSO₃ addition, and 134 °C and 41 min for limonene using 5, 5, 3, and 1 of the responses, respectively. Unlike many existing studies, multiple target variables were simultaneously considered using RSM, providing the opportunity to obtain valuable extracts with a high concentration of condensed tannins and total phenolics exhibiting antioxidant and antibacterial properties. Under the optimized conditions, aqueous ethanol extraction resulted in a

higher overall yield (241 mg/g) with increased antioxidant activities (FRAP 412 μM Fe(II) eq/g and ORAC 2664 μM TE/g) and bacterial inhibition (36% against *E. coli* and 54% against *S. aureus*) compared to water (yield 303 mg/g; FRAP 303 μM Fe(II) eq/g; ORAC 1933 μM TE/g; 12% inhibition against *E. coli* and 16% against *S. aureus*). Chemical addition to water produced extracts with even higher antioxidant values than those with aqueous ethanol (FRAP 977 μM Fe(II) eq/g; ORAC 4280 μM TE/g) but likely resulted in sulfonated condensed tannins, leading to a decrease in CT from 4.2 g/100 g in aqueous ethanol to 0.1 g/100 g in water with Na_2CO_3 + NaHSO_3 extraction. In this work, while industrial scale was used for the logging residue assortment, laboratory-scale extraction was employed for the optimization process. The optimized extraction conditions can also be scaled up for industrial use, which, however, remains a prospect for future work.

■ ASSOCIATED CONTENT

SI Supporting Information

The Supporting Information is available free of charge at <https://pubs.acs.org/doi/10.1021/acssusresmgt.3c00050>.

Detailed method descriptions for individual responses; mathematical modeling; optimized factors; two-factor central composite quadratic design used for optimization; analysis of variance for the fitted models; individual responses used for the optimization; theoretical and experimental results at conditions 110 °C and 60 min; RSM responses for total dissolved solids; RSM responses for total phenolic content; RSM responses for antioxidant activity for water with Na_2CO_3 + NaHSO_3 and limonene extracts (PDF)

■ AUTHOR INFORMATION

Corresponding Author

Jenni Tienaho – Production Systems, Natural Resources Institute Finland (Luke), FI-00790 Helsinki, Finland; orcid.org/0000-0002-7089-7832; Email: jenni.tienaho@luke.fi

Authors

Marina Fidelis – Production Systems, Natural Resources Institute Finland (Luke), FI-00790 Helsinki, Finland; Food Sciences Unit, Department of Life Technologies, University of Turku, FI-20014 Turku, Finland

Hanna Brännström – Production Systems, Natural Resources Institute Finland (Luke), FI-67100 Kokkola, Finland

Jarkko Hellström – Production Systems, Natural Resources Institute Finland (Luke), FI-31600 Jokioinen, Finland

Magnus Rudolfsson – Unit of Biomass Technology and Chemistry, Swedish University of Agricultural Sciences, SE-901 83 Umeå, Sweden

Atanu Kumar Das – Unit of Biomass Technology and Chemistry, Swedish University of Agricultural Sciences, SE-901 83 Umeå, Sweden

Jaana Liimatainen – Production Systems, Natural Resources Institute Finland (Luke), FI-00790 Helsinki, Finland

Anuj Kumar – Production Systems, Natural Resources Institute Finland (Luke), FI-00790 Helsinki, Finland; orcid.org/0000-0001-6940-3850

Mika Kurkilahti – Natural Resources, Natural Resources Institute Finland (Luke), FI-20520 Turku, Finland

Petri Kilpeläinen – Production Systems, Natural Resources Institute Finland (Luke), FI-00790 Helsinki, Finland; orcid.org/0000-0002-0982-0123

Complete contact information is available at:

<https://pubs.acs.org/doi/10.1021/acssusresmgt.3c00050>

Author Contributions

The manuscript was written through contributions of all authors. All authors have given approval to the final version of the manuscript.

Notes

The authors declare no competing financial interest.

■ ACKNOWLEDGMENTS

This study was conducted as part of the EU Interreg Botnia-Atlantica 2014–2020 program for the project Added Value from Logging Residues (20302839). The Natural Resources Institute Finland also provided resources through the thematic project Positive Fibers. The BioFuel Region and Dr. Magnus Matisons are acknowledged for the excellent project management. Ulla Jauhiainen, Pauli Karppinen, Piia Grandell, and Kalle Kaipainen are warmly acknowledged for the skillful technical assistance at the Natural Resources Institute Finland, Luke, laboratories. The authors also thank Gunnar Kalén for assistance with biomass separation at BTC.

■ ABBREVIATIONS

AA eq = ascorbic acid equivalent; ASE = accelerated solvent extraction; aq. = aqueous; CT = condensed tannins; CUPRAC = cupric ion reducing antioxidant capacity; DOE = design of experiment; DP = degree of polymerization; DPPH = 2,2-diphenyl-1-picrylhydrazyl radical; DW = dry weight; eq = equivalent; 2FI = two-factor interaction; FRAP = ferric reducing antioxidant potential; GAE = gallic acid equivalent; HAT = hydrogen-atom transfer; LA = lysogeny agar; ORAC = oxygen radical absorbance capacity; PB = phosphate buffer; PC = procyanidin; PD = prodelphinidin; RLU = relative light unit; RSM = response surface methodology; SET = single electron transfer; TDS = total dissolved solids; TE = Trolox equivalent; TPC = total phenolic content; TPTZ = 2,4,6-tris(2-pyridyl)-s-triazine

■ REFERENCES

- (1) Moskalik, T.; Gendek, A. Production of Chips from Logging Residues and Their Quality for Energy: A Review of European Literature. *Forests* **2019**, *10* (3), 262.
- (2) Natural Resources Institute Finland, MELA (Metsälaskelma). Alueelliset Hakkuumahdollisuusarviot [Regional Cutting Possibilities], 2023.
- (3) Hakkila, P. *Metsäenergia (Forest energy)*; Metsäntutkimuslaitoksen tiedonantoja, 1992; Vol. 1992.
- (4) Palviainen, M.; Finér, L.; Kurka, A.-M.; Mannerkoski, H.; Piirainen, S.; Starr, M. Decomposition and Nutrient Release from Logging Residues after Clear-Cutting of Mixed Boreal Forest. *Plant and Soil* **2004**, *263* (1), 53–67.
- (5) Wei, X.; Yang, Y.; Shen, Y.; Chen, Z.; Dong, Y.; Wu, F.; Zhang, L. Effects of Litterfall on the Accumulation of Extracted Soil Humic Substances in Subalpine Forests. *Front. Plant Sci.* **2020**, *11*, No. 254.
- (6) Törmänen, T.; Smolander, A. Biological Nitrogen Fixation in Logging Residue Piles of Different Tree Species after Final Felling. *Journal of Environmental Management* **2022**, *303*, No. 113942.
- (7) Kumar, A.; Adamopoulos, S.; Jones, D.; Amiamdhamen, S. O. Forest Biomass Availability and Utilization Potential in Sweden: A Review. *Waste Biomass Valor* **2021**, *12* (1), 65–80.

- (8) Ranius, T.; Hämäläinen, A.; Egnell, G.; Olsson, B.; Eklöf, K.; Stendahl, J.; Rudolph, J.; Sténs, A.; Felton, A. The Effects of Logging Residue Extraction for Energy on Ecosystem Services and Biodiversity: A Synthesis. *Journal of Environmental Management* **2018**, *209*, 409–425.
- (9) Spinelli, R.; Visser, R.; Björheden, R.; Röser, D. Recovering Energy Biomass in Conventional Forest Operations: A Review of Integrated Harvesting Systems. *Curr. Forestry Rep* **2019**, *5* (2), 90–100.
- (10) Amiandamhen, S. O.; Kumar, A.; Adamopoulos, S.; Jones, D.; Nilsson, B. Bioenergy Production and Utilization in Different Sectors in Sweden: A State of the Art Review. *BioRes.* **2020**, *15* (4), 9834–9857.
- (11) Eliasson, L.; Anerud, E.; Eriksson, A.; von Hofsten, H. Productivity and Costs of Sieving Logging Residue Chips. *International Journal of Forest Engineering* **2022**, *33* (1), 80–86.
- (12) Xu, C.; Möttönen, V.; Suvanto, S.; Kilpeläinen, P.; Brännström, H.; Turunen, O.; Kumar, A. Utilization of Logging Residue Powder as a Bio-Based Reinforcement for Injection Molded Poly(Lactic Acid) Biocomposites. *Industrial Crops and Products* **2022**, *187*, No. 115370.
- (13) Çetinkaya, D.; Bilir, N. Effect of Using Harvesting Residues as a Nursery Media on Seedling Weight in Brutian Pine (*Pinus Brutia* Ten.). *Refo* **2020**, No. 9, 37–43.
- (14) Verkasalo, E.; Möttönen, V.; Roitto, M.; Vepsäläinen, J.; Kumar, A.; Ilvesniemi, H.; Siwale, W.; Julkunen-Tiitto, R.; Raatikainen, O.; Sikanen, L. Extractives of Stemwood and Sawmill Residues of Scots Pine (*Pinus Sylvestris* L.) for Biorefining in Four Climatic Regions in Finland—Phenolic and Resin Acid Compounds. *Forests* **2021**, *12* (2), 192.
- (15) Jyske, T.; Järvenpää, E.; Kunnas, S.; Sarjala, T.; Raitanen, J.-E.; Mäki, M.; Pastell, H.; Korpinen, R.; Kaseva, J.; Tupasela, T. Sprouts and Needles of Norway Spruce (*Picea Abies* (L.) Karst.) as Nordic Specialty—Consumer Acceptance, Stability of Nutrients, and Bioactivities during Storage. *Molecules* **2020**, *25* (18), 4187.
- (16) Voipio, R.; Laakso, T. *Pienikokoisten puiden maanpäällisen biomassan kemiallinen koostumus (Chemical composition of the above ground biomass of small-sized trees)*; Folia forestalia; Metsäntutkimuslaitos: Helsinki, 1992.
- (17) Mofikoya, O. O.; Eronen, E.; Mäkinen, M.; Jänis, J. Production and Characterization of Hydrothermal Extracts of the Needles from Four Conifer Tree Species: Scots Pine, Norway Spruce, Common Juniper, and European Larch. *ACS Sustainable Chem. Eng.* **2023**, *11* (4), 1540–1547.
- (18) Mofikoya, O. O.; Mäkinen, M.; Jänis, J. Compositional Analysis of Essential Oil and Solvent Extracts of Norway Spruce Sprouts by Ultrahigh-resolution Mass Spectrometry. *Phytochemical Analysis* **2022**, *33* (3), 392–401.
- (19) Mofikoya, O. O.; Mäkinen, M.; Jänis, J. Chemical Fingerprinting of Conifer Needle Essential Oils and Solvent Extracts by Ultrahigh-Resolution Fourier Transform Ion Cyclotron Resonance Mass Spectrometry. *ACS Omega* **2020**, *5* (18), 10543–10552.
- (20) Bennett, R. N.; Wallsgrove, R. M. Secondary Metabolites in Plant Defence Mechanisms. *New Phytologist* **1994**, *127* (4), 617–633.
- (21) Santos, M. B.; Sillero, L.; Gatto, D. A.; Labidi, J. Bioactive Molecules in Wood Extractives: Methods of Extraction and Separation, a Review. *Ind. Crops Prod.* **2022**, *186*, 115231.
- (22) Payne, D. J.; Gwynn, M. N.; Holmes, D. J.; Pompliano, D. L. Drugs for Bad Bugs: Confronting the Challenges of Antibacterial Discovery. *Nat. Rev. Drug Discov* **2007**, *6* (1), 29–40.
- (23) Royer, M.; Houde, R.; Viano, Y.; Stevanovic, T. Non-Wood Forest Products Based on Extractives - A New Opportunity for the Canadian Forest Industry Part 1: Hardwood Forest Species. *JFR* **2012**, *1* (3), 8.
- (24) Routa, J.; Brännström, H.; Anttila, P.; Mäkinen, M.; Jänis, J.; Asikainen, A. Wood Extractives of Finnish Pine, Spruce and Birch – Availability and Optimal Sources of Compounds. *Natural resources and bioeconomy studies 73/2017*; Natural Resources Institute Finland (Luke): Helsinki, 2017.
- (25) Holmbom, B. Extraction and Utilization of Non-Structural Wood and Bark Components. In *Biorefining of Forest Resources*; Alén, R., Ed.; Papermaking Science and Technology; TAPPI: Finland, 2011; pp 178–224.
- (26) Kemppainen, K. Production of Sugars, Ethanol and Tannin from Spruce Bark and Recovered Fibres. Dissertation, Aalto University, 2015; <https://aaltodoc.aalto.fi/handle/123456789/15348>.
- (27) Jiang, W.; Kumar, A.; Adamopoulos, S. Liquefaction of Lignocellulosic Materials and Its Applications in Wood Adhesives—A Review. *Industrial Crops and Products* **2018**, *124*, 325–342.
- (28) Hemmilä, V.; Adamopoulos, S.; Karlsson, O.; Kumar, A. Development of Sustainable Bio-Adhesives for Engineered Wood Panels – A Review. *RSC Adv.* **2017**, *7* (61), 38604–38630.
- (29) Kumar, A.; Korpinen, R.; Möttönen, V.; Verkasalo, E. Suberin Fatty Acid Hydrolysates from Outer Birch Bark for Hydrophobic Coating on Aspen Wood Surface. *Polymers* **2022**, *14* (4), 832.
- (30) De Monte, C.; Carradori, S.; Granese, A.; Di Pierro, G. B.; Leonardo, C.; De Nunzio, C. Modern Extraction Techniques and Their Impact on the Pharmacological Profile of *Serenoa Repens* Extracts for the Treatment of Lower Urinary Tract Symptoms. *BMC Urol* **2014**, *14* (1), No. 63.
- (31) Pfennig, A.; Delinski, D.; Johannsbauer, W.; Josten, H. Extraction Technology. In *Industrial Scale Natural Products Extraction*; Bart, H., Pilz, S., Eds.; Wiley, 2011; pp 181–220; DOI: 10.1002/9783527635122.ch6.
- (32) Tura, D.; Robards, K. Sample Handling Strategies for the Determination of Biophenols in Food and Plants. *Journal of Chromatography A* **2002**, *975* (1), 71–93.
- (33) Naima, R.; Oumam, M.; Hannache, H.; Sesbou, A.; Charrier, B.; Pizzi, A.; Charrier-El Bouhtoury, F. Comparison of the Impact of Different Extraction Methods on Polyphenols Yields and Tannins Extracted from Moroccan Acacia Mollissima Barks. *Ind. Crops Prod.* **2015**, *70*, 245–252.
- (34) Seidel, V. Initial and Bulk Extraction of Natural Products Isolation. In *Natural Products Isolation*; Sarker, S. D., Nahar, L., Eds.; Methods in Molecular Biology; Humana Press: Totowa, NJ, 2012; Vol. 864, pp 27–41; DOI: 10.1007/978-1-61779-624-1_2.
- (35) Zhang, Q.-W.; Lin, L.-G.; Ye, W.-C. Techniques for Extraction and Isolation of Natural Products: A Comprehensive Review. *Chin Med.* **2018**, *13* (1), 20.
- (36) Esclapez, M. D.; García-Pérez, J. V.; Mulet, A.; Cárcel, J. A. Ultrasound-Assisted Extraction of Natural Products. *Food Eng. Rev.* **2011**, *3* (2), 108–120.
- (37) Dorta, E.; Lobo, M. G.; Gonzalez, M. Reutilization of Mango Byproducts: Study of the Effect of Extraction Solvent and Temperature on Their Antioxidant Properties. *J. Food Sci.* **2012**, *77* (1), C80–C88.
- (38) Kaczorová, D.; Karalija, E.; Dahija, S.; Bešta-Gajević, R.; Parić, A.; Čavar Zeljko, S. Influence of Extraction Solvent on the Phenolic Profile and Bioactivity of Two *Achillea* Species. *Molecules* **2021**, *26* (6), 1601.
- (39) Prat, D.; Wells, A.; Hayler, J.; Sneddon, H.; McElroy, C. R.; Abou-Shehadeh, S.; Dunn, P. J. CHEM21 Selection Guide of Classical and Less Classical-Solvents. *Green Chem.* **2016**, *18* (1), 288–296.
- (40) Kilpeläinen, P.; Liski, E.; Saranpää, P. Optimising and Scaling up Hot Water Extraction of Tannins from Norway Spruce and Scots Pine Bark. *Industrial Crops and Products* **2023**, *192*, No. 116089.
- (41) Ma, L.; Watrelot, A. A.; Addison, B.; Waterhouse, A. L. Condensed Tannin Reacts with SO₂ during Wine Aging, Yielding Flavan-3-Ol Sulfonates. *J. Agric. Food Chem.* **2018**, *66* (35), 9259–9268.
- (42) Consolidated Text: Directive 2009/32/EC of the European Parliament and of the Council of 23 April 2009 on the Approximation of the Laws of the Member States on Extraction Solvents Used in the Production of Foodstuffs and Food Ingredients (Recast) (Text with EEA Relevance), 2009.
- (43) Persson, M.; Sjödin, K.; Borg-Karlson, A.-K.; Norin, T.; Ekberg, I. Relative Amounts and Enantiomeric Compositions of Monoterpene

Hydrocarbons in Xylem and Needles of Picea Abies. *Phytochemistry* **1996**, 42 (5), 1289–1297.

(44) Muilu-Mäkelä, R.; Kilpeläinen, P.; Kitunen, V.; Harju, A.; Venäläinen, M.; Sarjala, T. Indoor Storage Time Affects the Quality and Quantity of Volatile Monoterpenes Emitted from Softwood Timber. *Holzforschung* **2021**, 75 (10), 945–956.

(45) Oliveira, R. M. A.; Henriques, J. D. O.; Sartoratto, A.; Maciel, M. R. W.; Martinez, P. F. M. Evaluation of Limonene in Sugarcane Wax Extraction. *Sustainable Chemistry and Pharmacy* **2022**, 27, No. 100657.

(46) Viot, M.; Tomao, V.; Ginies, C.; Visinoni, F.; Chemat, F. Green Procedure with a Green Solvent for Fats and Oils' Determination. *J. Chromatogr. A* **2008**, 1196–1197, 147–152.

(47) Pagliaro, M.; Fabiano-Tixier, A.-S.; Ciriminna, R. Limonene as a Natural Product Extraction Solvent. *Green Chem.* **2023**, 25 (16), 6108–6119.

(48) Jylhä, P.; Halmemies, E.; Hellström, J.; Hujala, M.; Kilpeläinen, P.; Brännström, H. The Effect of Thermal Drying on the Contents of Condensed Tannins and Stilbenes in Norway Spruce (Picea Abies [L.] Karst.) Sawmill Bark. *Industrial Crops and Products* **2021**, 173, No. 114090.

(49) Halmemies, E. S.; Alén, R.; Hellström, J.; Läspä, O.; Nurmi, J.; Hujala, M.; Brännström, H. E. Behaviour of Extractives in Norway Spruce (Picea Abies) Bark during Pile Storage. *Molecules* **2022**, 27 (4), 1186.

(50) Jyske, T.; Brännström, H.; Sarjala, T.; Hellström, J.; Halmemies, E.; Raitanen, J.-E.; Kaseva, J.; Lagerquist, L.; Eklund, P.; Nurmi, J. Fate of Antioxidative Compounds within Bark during Storage: A Case of Norway Spruce Logs. *Molecules* **2020**, 25 (18), 4228.

(51) Ayeni, A. O.; Hymore, F. K.; Mudliar, S. N.; Deshmukh, S. C.; Satpute, D. B.; Omoleye, J. A.; Pandey, R. A. Hydrogen Peroxide and Lime Based Oxidative Pretreatment of Wood Waste to Enhance Enzymatic Hydrolysis for a Biorefinery: Process Parameters Optimization Using Response Surface Methodology. *Fuel* **2013**, 106, 187–194.

(52) Hayta, M.; İşçimen, E. M. Optimization of Ultrasound-Assisted Antioxidant Compounds Extraction from Germinated Chickpea Using Response Surface Methodology. *LWT* **2017**, 77, 208–216.

(53) Jagaba, A. H.; Kutty, S. R. M.; Naushad, Mu.; Lawal, I. M.; Noor, A.; Affam, A. C.; Birniwa, A. H.; Abubakar, S.; Soja, U. B.; Abioye, K. J.; Bathula, C. Removal of Nutrients from Pulp and Paper Biorefinery Effluent: Operation, Kinetic Modelling and Optimization by Response Surface Methodology. *Environmental Research* **2022**, 214, No. 114091.

(54) Martínez-Patiño, J. C.; Gullón, B.; Romero, I.; Ruiz, E.; Brnčić, M.; Žlabur, J. Š.; Castro, E. Optimization of Ultrasound-Assisted Extraction of Biomass from Olive Trees Using Response Surface Methodology. *Ultrasonics Sonochemistry* **2019**, 51, 487–495.

(55) Pereira, L. M. S.; Milan, T. M.; Tapia-Blácido, D. R. Using Response Surface Methodology (RSM) to Optimize 2G Bioethanol Production: A Review. *Biomass and Bioenergy* **2021**, 151, No. 106166.

(56) Mäkelä, M.; Geladi, P.; Grimm, A.; Dahl, O.; Pietiläinen, A.; Larsson, S. H. Cyclone Processing of Green Liquor Dregs (GLD) with Results Measured and Interpreted by ICP-OES and NIR Spectroscopy. *Chem. Eng. J.* **2016**, 304, 448–453.

(57) Myers, R. H.; Montgomery, D. C.; Anderson-Cook, C. *Response Surface Methodology: Process and Product Optimization Using Designed Experiments*, 4th ed.; Wiley series in probability and statistics; Wiley: Hoboken, NJ, 2016.

(58) Slimestad, R.; Hostettmann, K. Characterisation of Phenolic Constituents from Juvenile and Mature Needles of Norway Spruce by Means of High Performance Liquid Chromatography-Mass Spectrometry. *Phytochem. Anal.* **1996**, 7 (1), 42–48.

(59) Nybakken, L.; Lie, M. H.; Julkunen-Tiitto, R.; Asplund, J.; Ohlson, M. Fertilization Changes Chemical Defense in Needles of Mature Norway Spruce (Picea Abies). *Front. Plant Sci.* **2018**, 9, No. 770.

(60) Fischbach, R. J.; Kossmann, B.; Panten, H.; Steinbrecher, R.; Heller, W.; Seidlitz, H. K.; Sandermann, H.; Hertkorn, N.; Schnitzler, J.-P. Seasonal Accumulation of ultraviolet-B Screening Pigments in Needles of Norway Spruce (Picea Abies (L.) Karst.). *Plant Cell & Environment* **1999**, 22 (1), 27–37.

(61) Rasi, S.; Kilpeläinen, P.; Rasa, K.; Korpinen, R.; Raitanen, J.-E.; Vainio, M.; Kitunen, V.; Pulkkinen, H.; Jyske, T. Cascade Processing of Softwood Bark with Hot Water Extraction, Pyrolysis and Anaerobic Digestion. *Bioresource Technology* **2019**, 292, No. 121893.

(62) Kempainen, K.; Siika-aho, M.; Pattathil, S.; Giovando, S.; Kruus, K. Spruce Bark as an Industrial Source of Condensed Tannins and Non-Cellulosic Sugars. *Industrial Crops and Products* **2014**, 52, 158–168.

(63) Raitanen, J.-E.; Järvenpää, E.; Korpinen, R.; Mäkinen, S.; Hellström, J.; Kilpeläinen, P.; Liimatainen, J.; Ora, A.; Tupasela, T.; Jyske, T. Tannins of Conifer Bark as Nordic Piquancy—Sustainable Preservative and Aroma? *Molecules* **2020**, 25 (3), 567.

(64) Pap, N.; Reshamwala, D.; Korpinen, R.; Kilpeläinen, P.; Fidelis, M.; Furtado, M. M.; Sant'Ana, A. S.; Wen, M.; Zhang, L.; Hellström, J.; Marnilla, P.; Mattila, P.; Sarjala, T.; Yang, B.; Lima, A. D. S.; Azevedo, L.; Marjomäki, V.; Granato, D. Toxicological and Bioactivity Evaluation of Blackcurrant Press Cake, Sea Buckthorn Leaves and Bark from Scots Pine and Norway Spruce Extracts under a Green Integrated Approach. *Food and Chemical Toxicology* **2021**, 153, No. 112284.

(65) del Río, J. C.; Rencoret, J.; Gutiérrez, A.; Kim, H.; Ralph, J. Unconventional Lignin Monomers—Extension of the Lignin Paradigm. *Advances in Botanical Research*; Elsevier, 2022; Vol. 104, pp 1–39; DOI: 10.1016/bs.abr.2022.02.001.

(66) Rencoret, J.; Neiva, D.; Marques, G.; Gutiérrez, A.; Kim, H.; Gominho, J.; Pereira, H.; Ralph, J.; del Río, J. C. Hydroxystilbene Glucosides Are Incorporated into Norway Spruce Bark Lignin. *Plant Physiol.* **2019**, 180 (3), 1310–1321.

(67) Granato, D.; Reshamwala, D.; Korpinen, R.; Azevedo, L.; Vieira do Carmo, M. A.; Cruz, T. M.; Marques, M. B.; Wen, M.; Zhang, L.; Marjomäki, V.; Kilpeläinen, P. From the Forest to the Plate – Hemicelluloses, Galactoglucomannan, Glucuronoxylan, and Phenolic-Rich Extracts from Unconventional Sources as Functional Food Ingredients. *Food Chemistry* **2022**, 381, No. 132284.

(68) Hofmann, T.; Albert, L.; Németh, L.; Vršanská, M.; Schlosserová, N.; Voběrková, S.; Visi-Rajczi, E. Antioxidant and Antibacterial Properties of Norway Spruce (Picea Abies H. Karst.) and Eastern Hemlock (Tsuga Canadensis (L.) Carrière) Cone Extracts. *Forests* **2021**, 12 (9), 1189.

(69) Shah, B. B.; Mehta, A. A. In Vitro Evaluation of Antioxidant Activity of D-Limonene. *Asian J. Pharm. Pharmacol* **2018**, 4 (6), 883–887.

(70) Välimaa, A.-L.; Raitanen, J.-E.; Tienaho, J.; Sarjala, T.; Nakayama, E.; Korpinen, R.; Mäkinen, S.; Eklund, P.; Willför, S.; Jyske, T. Enhancement of Norway Spruce Bark Side-Streams: Modification of Bioactive and Protective Properties of Stilbenoid-Rich Extracts by UVA-Irradiation. *Industrial Crops and Products* **2020**, 145, No. 112150.

(71) Muilu-Mäkelä, R.; Aapola, U.; Tienaho, J.; Uusitalo, H.; Sarjala, T. Antibacterial and Oxidative Stress-Protective Effects of Five Monoterpenes from Softwood. *Molecules* **2022**, 27 (12), 3891.

(72) Garzoli, S.; Masci, V. L.; Caradonna, V.; Tiezzi, A.; Giacomello, P.; Ovidi, E. Liquid and Vapor Phase of Four Conifer-Derived Essential Oils: Comparison of Chemical Compositions and Antimicrobial and Antioxidant Properties. *Pharmaceuticals* **2021**, 14 (2), 134.

(73) Visan, D.-C.; Oprea, E.; Radulescu, V.; Voiculescu, I.; Biris, I.-A.; Cotar, A. I.; Saviuc, C.; Chifriuc, M. C.; Marinas, I. C. Original Contributions to the Chemical Composition, Microbicidal, Virulence-Arresting and Antibiotic-Enhancing Activity of Essential Oils from Four Coniferous Species. *Pharmaceuticals* **2021**, 14 (11), 1159.

(74) Metsämuuronen, S.; Siren, H. Antibacterial Compounds in Predominant Trees in Finland: Review. *J. Bioprocess. Biotech.* **2014**, 2014, 1–13.

- (75) Metsämuuronen, S.; Sirén, H. Bioactive Phenolic Compounds, Metabolism and Properties: A Review on Valuable Chemical Compounds in Scots Pine and Norway Spruce. *Phytochem Rev.* **2019**, *18* (3), 623–664.
- (76) Eberhardt, T. L.; Young, R. A. Conifer Seed Cone Proanthocyanidin Polymers: Characterization by ¹³C NMR Spectroscopy and Determination of Antifungal Activities. *J. Agric. Food Chem.* **1994**, *42* (8), 1704–1708.
- (77) Fyhrquist, P.; Virjamo, V.; Hiltunen, E.; Julkunen-Tiitto, R. Epidihydropinidine, the Main Piperidine Alkaloid Compound of Norway Spruce (*Picea Abies*) Shows Promising Antibacterial and Anti-Candida Activity. *Fitoterapia* **2017**, *117*, 138–146.
- (78) Kanerva, S.; Kitunen, V.; Kiikkilä, O.; Loponen, J.; Smolander, A. Response of Soil C and N Transformations to Tannin Fractions Originating from Scots Pine and Norway Spruce Needles. *Soil Biology and Biochemistry* **2006**, *38* (6), 1364–1374.
- (79) Mäkinen, S.; Hellström, J.; Mäki, M.; Korpinen, R.; Mattila, P. H. Bilberry and Sea Buckthorn Leaves and Their Subcritical Water Extracts Prevent Lipid Oxidation in Meat Products. *Foods* **2020**, *9* (3), 265.
- (80) Che Sulaiman, I. S.; Basri, M.; Fard Masoumi, H. R.; Chee, W. J.; Ashari, S. E.; Ismail, M. Effects of Temperature, Time, and Solvent Ratio on the Extraction of Phenolic Compounds and the Anti-Radical Activity of *Clinacanthus Nutans* Lindau Leaves by Response Surface Methodology. *Chemistry Central Journal* **2017**, *11* (1), No. 54.
- (81) Golmakani, M.-T.; Mendiola, J. A.; Rezaei, K.; Ibáñez, E. Pressurized Limonene as an Alternative Bio-Solvent for the Extraction of Lipids from Marine Microorganisms. *Journal of Supercritical Fluids* **2014**, *92*, 1–7.